

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
21 May 2004 (21.05.2004)


PCT

(10) International Publication Number  
WO 2004/041016 A1

- (51) International Patent Classification<sup>7</sup>: A43C 15/08, 15/14, 15/16
- (21) International Application Number: PCT/IT2003/000714
- (22) International Filing Date: 4 November 2003 (04.11.2003)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data: RM2002A000556  
5 November 2002 (05.11.2002) IT
- (71) Applicant (for all designated States except US): AL.PI. S.r.L. [IT/IT]; Via Dante Alighieri, 215, I-62012 Civitanova Marche (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BIANCUCCI, Demetrio [IT/IT]; Via Dante Alighieri, 215, I-62012 Civitanova Marche (IT). BRASCA, Alfredo [IT/IT]; Via Civitanova, 79, I-62012 Civitanova Marche (IT).
- (54) Agent: SARPI, Maurizio; Studio Ferrario, Via Collina, 36, I-00187 Roma (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: IMPROVED SHOE SOLE PROVIDED WITH RETRACTABLE ANTI-SLIPPING MEANS

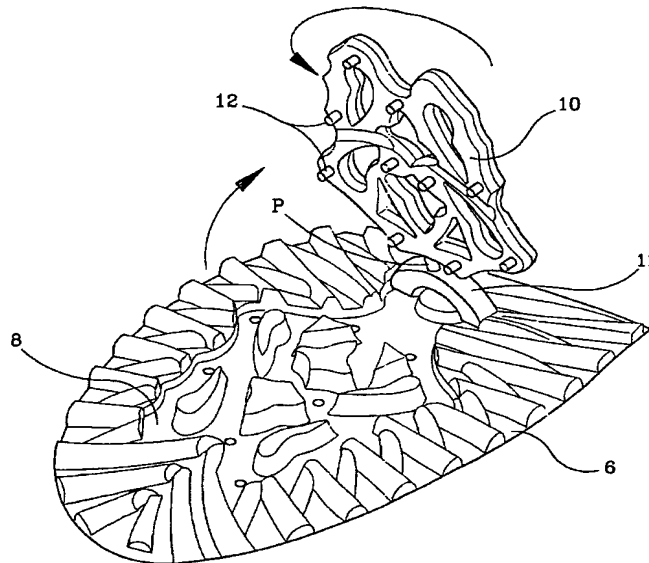

(57) Abstract: A sole (6) for anti-slipping shoes of the type comprising foldaway anti-slipping means (12) arranged in the face of the sole that will come in touch with the ground, characterized in that said anti-slipping means to increase the adherence to the ground are secured to rigid or semirigid supporting members (10) that are hinged to the sole so as to be lifted from the same by rotation like a flag by at least 180° with respect to a symmetry axis other than the axis of hinge/lifting from the shoe sole and not parallel thereto. Each said supporting member being housed during the use of the sole in its own single recess or groove (8) arranged in the sole portions.

**WO 2004/041016 A1**



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Improved shoe sole provided with retractable anti-slipping means

The present invention relates to the footwear industry and more specifically concerns the manufacturing of soles for shoes to be used where the ground is particularly slippery, for example frozen, snowy or muddy ground.

It is well known that under such circumstances anyone can hardly stand. The danger of slipping can obviously be avoided by resorting to the known hobnail shoes or shoes provided with particular high-adherence soles which, however, are technical shoes with precise characteristics of weight and strength and not compatible with the normal use of shoes.

The resort to hobnail shoes could once be avoided by applying sealskins or the like to shoes to prevent the sole from touching the frozen ground. Based on the same principle are rubber sheaths available on the market today which have to be secured to shoes in a removable manner and carry a number of nails or hooks on the face directed to ground.

Such solution, however, has the serious drawback of forcing the user, whenever he or she enters a habitation or leaves the road to enter a building, to remove the sheathes from the shoes to avoid that its nails or hooks damage floors by somehow or other. It is self-evident that such operation, uncomfortable in itself, requires that user must take away the sheathes with him or her waiting for put them on again.

To overcome such problems, Italian Patent 1299575 in the name of the same Applicants discloses soles provided with nails or hooks which are secured to suitable supporting members that can be folded by 180° and have ends hinged directly to the sole so that they can be rotated from extracted to retracted positions to be housed into suitable specular grooves reproducing their shapes and preferably formed in the thickness of the tread.

Even if such known soles provide the desired increase in the adherence, they are not able to satisfy some specific requirements of the market.

A first limit of such known devices is that such folding hobnail supporting members located both in the sole and heel portions must each take up a lower room than half the room taken up by the corresponding area of shoe sole and heel portions, respectively. This results from that each supporting member is accommodated in one of the two specular grooves associated thereto both in its position of use (extracted hobnails) and rest position (retracted hobnails). Such specular grooves have to be arranged of course in the corresponding area of the shoe sole (sole or heel portions) so that the extension of the hobnail supporting members is limited, especially in the heel portion both for reasons of size and not to weaken too much the structure of the whole sole.

A second limit is that the specular grooves that are not occupied by the corresponding folding hobnail supporting member can easily collect dirt, mould, mud,

etc., which requires that the user cleans perfectly the obstructed grooves before folding the corresponding hobnail supporting members to be put inside them.

5 A first object of the present invention is to provide a shoe sole provided with foldaway means to increase the adherence to the ground and arranged in the tread of the sole and heel portions so as to take up all of the available surface of the sole and heel portions,  
10 respectively.

A second object of the invention is to provide a shoe sole of the above-mentioned type, wherein only one print or housing groove to be used in both modes of application is provided for each such means to  
15 increase the adherence to the ground.

This has been accomplished according to the invention by providing a shoe sole provided at the face in touch with the ground with anti-slipping means to increase the adherence, such as a plurality of solid hooks or  
20 nails or a coating of high-adherence rubber material, which means are not fixed to such sole but are secured so that they can pass from an extracted position in touch with the ground to a concealed position where they do not interfere with the roadway. According to  
25 the invention, such means to increase the adherence to the ground are secured to suitable solid supporting members that are hinged to the sole so as to be lifted from the same by rotation like a flag by at least 180° with respect to a symmetry axis other than the axis of  
30 hinge/lifting from the shoe sole and not parallel

thereto. Each such supporting member at the heel and/or at the sole is housed in its own single recess or groove arranged in a corresponding position in the heel and sole portions, respectively.

5 In a preferred embodiment the pivoting, folding supporting members have two opposite faces to one of which such means to increase the adherence are secured. In a first position, the position of use, the nails or the coating of rubber material protrude from  
10 the sole by as much as it is enough to guarantee the grip to the ground. In the second position, the rest position, the nails or the rubber coating are directed to the shoe sole and are housed within suitable recesses formed in corresponding positions in the  
15 bottom of the print receiving the supporting members so that the continuity of the shoe sole is restored without any protrusion.

Further features and advantages of the invention will  
20 be more readily apparent from the following detailed description with reference to the accompanying drawings that show by way of a not limited example a preferred embodiment thereof.

In the drawings:

25 Figure 1 is a front view of the sole in the usual configuration;

Figure 2 is a perspective view of the invention  
30 showing the supporting member for the adherence

increasing means while it is being lifted from the shoe sole by rotation like a flag to be then rotated by 180° about a symmetry axis so as to direct to the outside the face to which the nails or the high-adherence rubber material is secured;

Figure 3 is a perspective view similar to the preceding figure showing the invention while such supporting member is being brought back to its initial position within the shoe sole, with the nails or the high-adherence rubber material being directed and protruding to the outside;

Figure 4, similar to Fig. 1, shows the shoe sole disclosed in configuration of use for a ground with poor adherence.

With reference to the figures, the anti-slipping shoe sole 6 according to the invention with foldaway hooks 12 (or areas of high-adherence rubber material) has at least a groove or print 8 on the face which will come in touch with the roadway, such print 8 being able to receive with a clearance rigid or semirigid supporting members 10 that can be shaped in most different ways, as shown, but are characterized in that they have at least a symmetry axis. Such supporting members 10 carry a plurality of nails or areas of high-adherence material 12 which are preferably of semirigid plastic material. Nails or hooks 12 are uniformly distributed all over the length thereof.

According to a peculiar feature of the invention, such supporting members 10 are hinged at one end of such symmetry axis about a hinge member 11 secured in a known manner to the shoe sole and having the rotation axis parallel thereto. In other words, the rotation like a flag to lift supporting means 10 is caused by such hinge member 11, while the 180°-folding rotation about its own symmetry axis occurs about pin P which connects such supporting means pivotably to the hinge member 11 that rotates with respect to sole 6.

It should be appreciated from the foregoing the practicality of the anti-slipping device of the present invention: the user has only to perform simple actions of lifting, folding, lowering supporting members 10 of nails 12 to pass from a smooth sole to be used in the interior to a hobnail sole for slippery surfaces.

In the illustrated embodiment, such hinge member 11 consists of a small arc having ends hinged to sole 6 and to which a pin P is secured. Such pin has its longitudinal axis coincident with a symmetry axis of supporting member 10 which is pivotable about pin P secured to such arc 11.

As already mentioned, only one print or groove 8 able to receive supporting means 10 of nails or areas of high-adherence material 12 in both configurations of use has the great advantage to make print 8 free of obstructions or fillings by mould or other materials which enter the recesses of the tread, as well known.

A preferred embodiment of the invention has been



described above. It is evident, however, that a number of modifications can be made by those skilled in the art without departing from the scope of the invention as defined in the appended claims. For example, instead of being hinged with respect to the sole that receives them, supporting members 10 of nails or hooks 12 can be snap fitted so as to be removed and inserted again after a rotation by 180° to make it visible either the face provided with nails or the smooth face.

## Claims

1. A sole (6) for anti-slipping shoes of the type comprising foldaway anti-slipping means (12) arranged in the face of the sole that will come in touch with the ground, characterized in that said anti-slipping means to increase the adherence to the ground are secured to rigid or semirigid supporting members (10) that are hinged to the sole so as to be lifted from the same by rotation like a flag by at least 180° with respect to a symmetry axis other than the axis of hinge/lifting from the shoe sole and not parallel thereto, each such supporting member at the heel portion and/or at the sole portion being housed in its own single recess or groove (8) arranged in the heel and sole portions, respectively.

2. The sole according to the preceding claim, characterized in that said folding supporting members (10) have two opposite faces to one of which said means (12) to increase the adherence consisting of nails or a coating of rubber material are secured, thus obtaining that in a first position, the position of use, said nails (12) protrude from the sole (6) by as much as it is enough to guarantee the grip to the ground, while in the second position, the rest position, the nails or the rubber coating are directed to the shoe sole and are housed within suitable recesses formed in corresponding positions in the bottom of the print (8) receiving the supporting

members so that the continuity of the shoe sole is restored without any protrusion.

3. The sole according to claim 1 or 2, characterized  
5 in that said supporting members (10) for the anti-slipping means (12) are hinged at one end of such symmetry axis about a hinge member (11) secured in a known manner to the shoe sole and having the rotation  
10 axis parallel thereto, thus obtaining that the rotation like a flag to lift supporting means (10) is caused by such hinge member (11), while the 180°-folding rotation about its own symmetry axis occurs about pin (P) which connects such supporting means pivotably to the hinge member (11) that rotates with  
15 respect to sole (6).

4. The sole according to the preceding claim, characterized in that said hinge member (11) consists  
20 of a small arc having ends hinged to sole (6) and to which a pin (P) is secured, said pin having its longitudinal axis coincident with a symmetry axis of supporting member (10) which is pivotable about pin (P) secured to such arc (11).

5. The sole according to any preceding claim, characterized in that only one print or groove (8)  
25 receives supporting means (10) of nails or areas of high-adherence material (12) in both "extracted" and "retracted" configurations, thus obtaining that said  
30 print (8) is free of obstructions or fillings by mould

or other materials which enter the recesses of the tread.

5 6. The sole according to any preceding claim, characterized in that said supporting means (10) of nails or areas of high-adherence material (12) and the corresponding print or groove (8) are formed both in the "sole" and the "heel" portions.

1/3

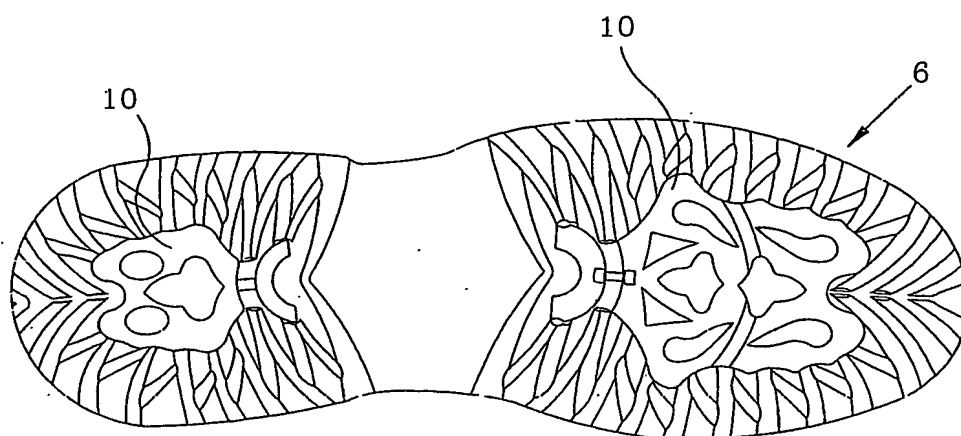


FIG. 1

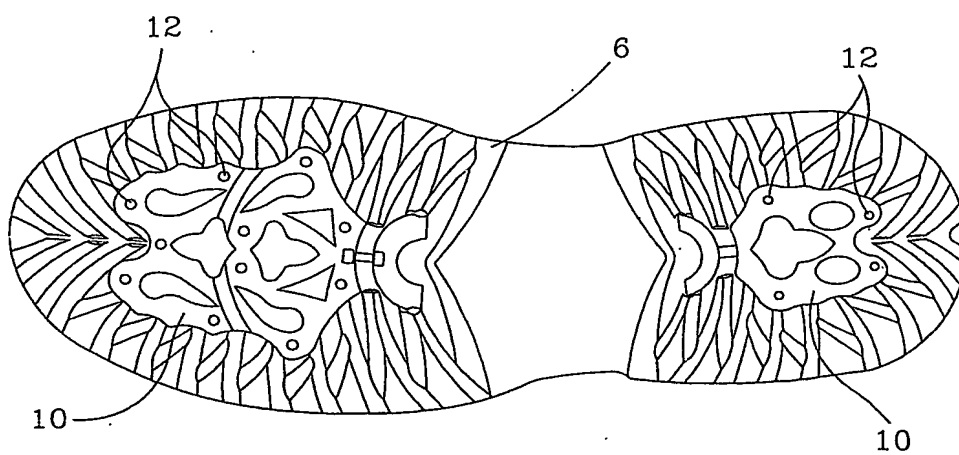


FIG. 4

2/3

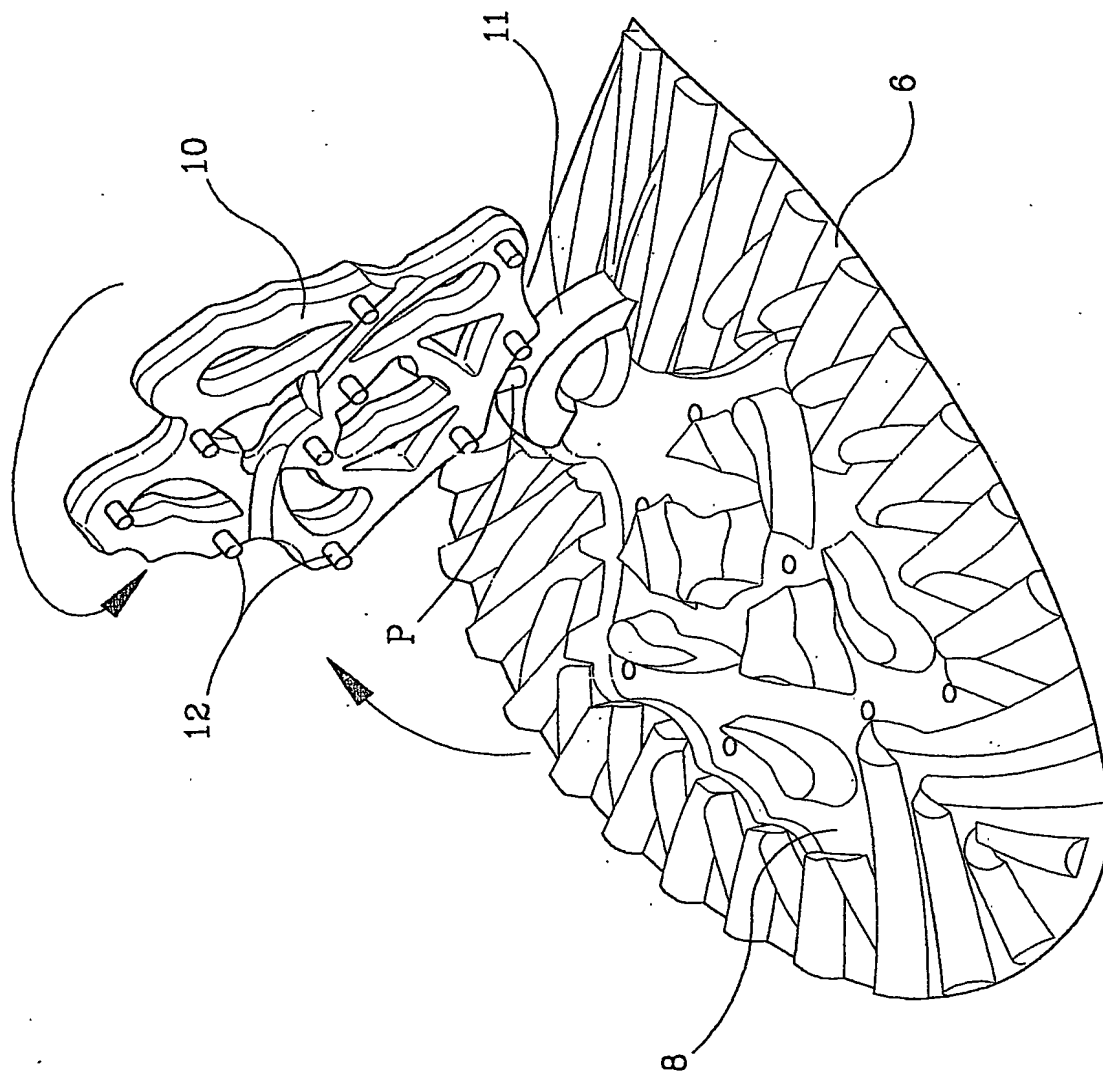


FIG. 2

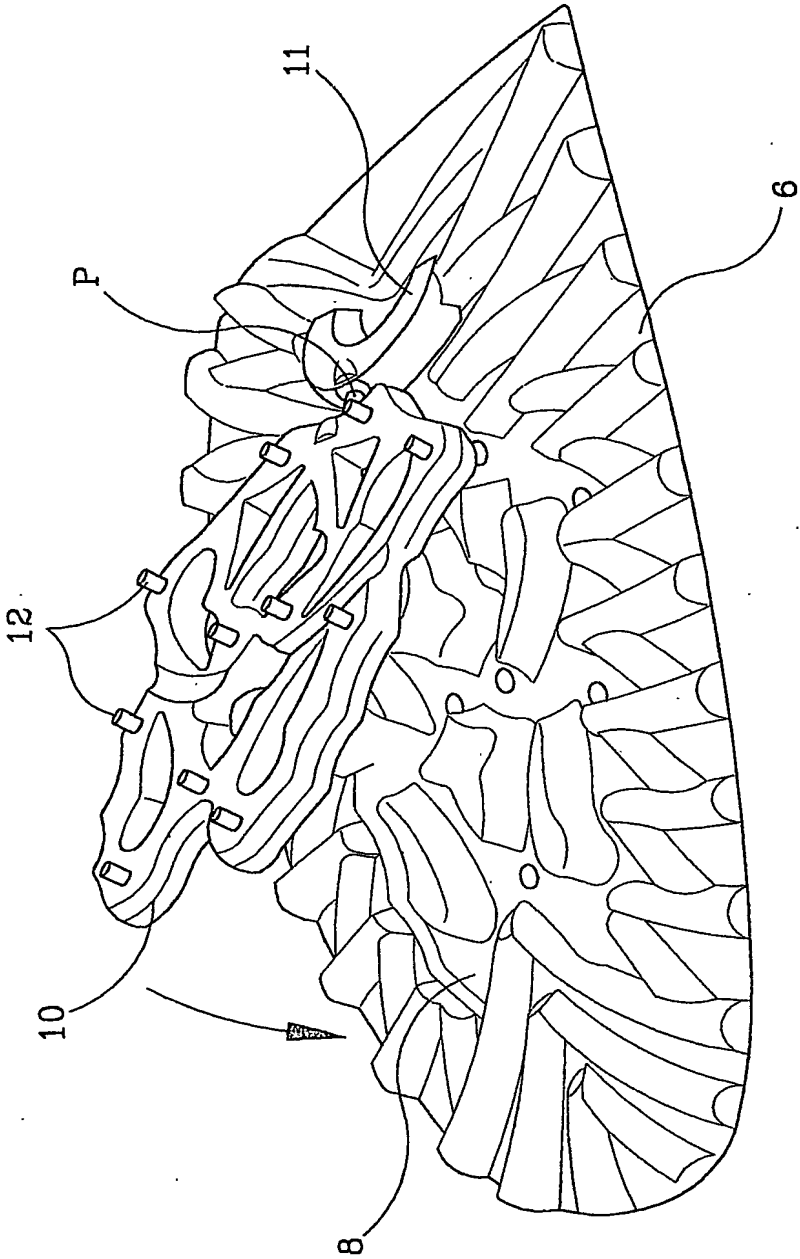


FIG. 3

## INTERNATIONAL SEARCH REPORT

Internatlc Application No

PCT/IT 03/00714

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A43C15/08 A43C15/14 A43C15/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A43C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 309 747 A (W.H. TORRENCE) 23 December 1884 (1884-12-23) page 1, line 46-85; figures 3-5,8 ---	1-6
Y	US 6 360 455 B1 (SEO SANG ROK) 26 March 2002 (2002-03-26) figure 1 ---	1-6
Y	US 4 745 692 A (LIAO KUO-CHEN) 24 May 1988 (1988-05-24) column 1, line 40 -column 2, line 39; figures 2,3 ---	1-3,5
A	FR 2 785 508 A (PETERS AMBROISE) 12 May 2000 (2000-05-12) page 1, line 11 -page 2, line 2; figures page 6, line 7-12 --- -/--	1-6

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

12 March 2004

Date of mailing of the international search report

23/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Herry, M



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00714

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 997 055 A (B. GILOWITZ) 4 July 1911 (1911-07-04) figures ---	1
A	WO 00 04803 A (BRASCA ALFREDO ;AL PI S N C DI BELFIGLIO LUCIA (IT); BIANCUCCI DEM) 3 February 2000 (2000-02-03) cited in the application the whole document -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 03/00714

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 309747	A		NONE	
US 6360455	B1	26-03-2002	CA 2375061 A1 WO 0187105 A1	22-11-2001 22-11-2001
US 4745692	A	24-05-1988	DE 3709215 A1 GB 2216771 A	06-10-1988 18-10-1989
FR 2785508	A	12-05-2000	FR 2785507 A1 FR 2785508 A1 EP 1044621 A2	12-05-2000 12-05-2000 18-10-2000
US 997055	A		NONE	
WO 0004803	A	03-02-2000	IT 1299575 B1 AT 236546 T AU 5192799 A CA 2337952 A1 CN 1311639 T DE 69906744 D1 DE 69906744 T2 DK 1096867 T3 EE 200100047 A EP 1096867 A1 ES 2194493 T3 HU 0102938 A2 WO 0004803 A1 JP 2002521075 T NO 20010399 A PL 345594 A1 SK 952001 A3 US 6675504 B1	16-03-2000 15-04-2003 14-02-2000 03-02-2000 05-09-2001 15-05-2003 29-01-2004 04-08-2003 17-06-2002 09-05-2001 16-11-2003 28-12-2001 03-02-2000 16-07-2002 23-01-2001 17-12-2001 10-07-2001 13-01-2004